
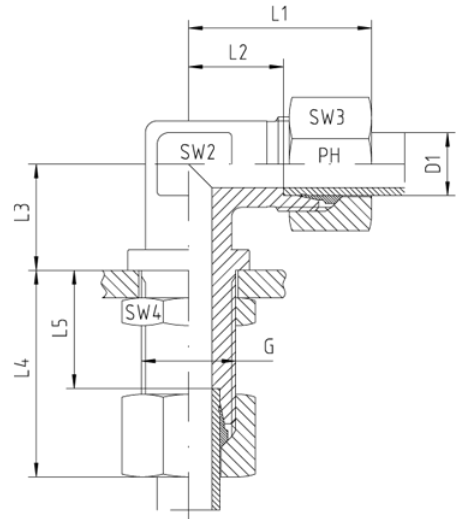


Rubrik 8.45

WSV - Verschraubungen - Standard

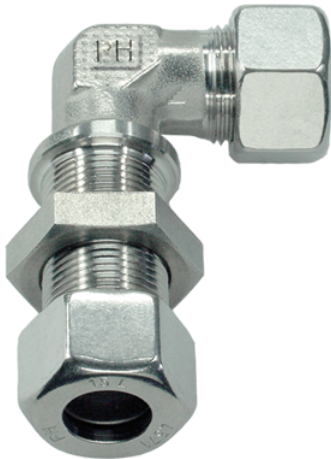

Winkel-Schottverschraubungen

Druck	Rohr A.D.	Gewinde	Ca. Maße								Bestellzeichen
PN	D1	G	L1	L2	L3	L4	L5	SW2	SW3	SW4	

Reihe L

315	6	M 12 x 1,5	27	12,0	14	42	27,0	12	14	17	WSV-L-06
315	8	M 14 x 1,5	29	14,0	17	42	27,0	12	17	19	WSV-L-08
315	10	M 16 x 1,5	30	15,0	18	43	28,0	14	19	22	WSV-L-10
315	12	M 18 x 1,5	32	17,0	20	44	29,0	17	22	24	WSV-L-12
315	15	M 22 x 1,5	36	21,0	23	46	31,0	19	27	30	WSV-L-15
315	18	M 26 x 1,5	40	23,0	24	49	32,5	24	32	36	WSV-L-18
160	22	M 30 x 2	44	27,0	30	51	34,5	27	36	41	WSV-L-22
160	28	M 36 x 2	47	30,0	34	52	35,5	36	41	46	WSV-L-28
160	35	M 45 x 2	56	34,0	39	58	36,5	41	50	55	WSV-L-35
160	42	M 52 x 2	63	40,0	43	59	36,0	50	60	65	WSV-L-42

Reihe S

630	6	M 14 x 1,5	31	16,0	17	44	29,0	12	17	19	WSV-S-06
630	8	M 16 x 1,5	32	17,0	18	44	29,0	14	19	22	WSV-S-08
630	10	M 18 x 1,5	34	17,0	20	46	29,5	17	22	24	WSV-S-10
630	12	M 20 x 1,5	38	21,0	21	47	30,5	17	24	27	WSV-S-12
630	14	M 22 x 1,5	40	22,0	23	50	32,0	19	27	30	WSV-S-14
400	16	M 24 x 1,5	43	24,0	24	50	31,5	24	30	32	WSV-S-16

400	20	M 30 x 2	48	26,0	30	55	33,5	27	36	41	WSV-S-20
400	25	M 36 x 2	54	30,0	34	59	35,0	36	46	46	WSV-S-25
400	30	M 42 x 2	62	35,5	39	64	37,5	41	50	50	WSV-S-30
315	38	M 52 x 2	72	41,0	43	68	37,0	50	60	65	WSV-S-38